


1/425e



## BIZERBA | SYSTEM CLASS

# SC 400

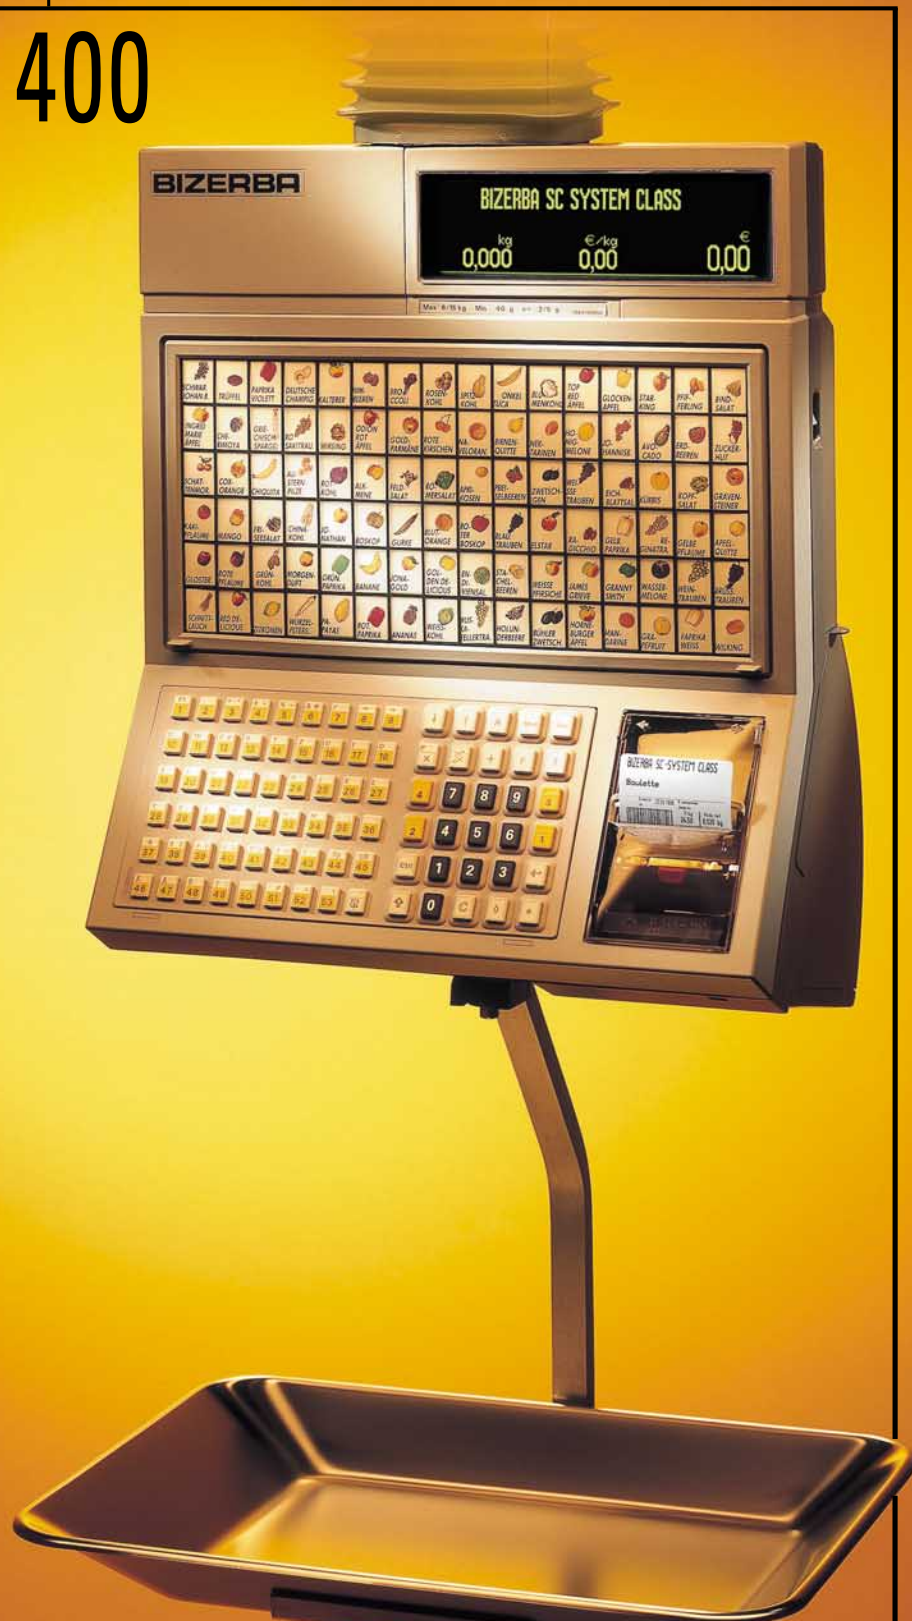

- CE
- SC
- BS
- ES
- BC
- CS
- EC

→ ELECTRONIC RETAIL SYSTEM SCALE WITH LABEL PRINTER IN A SPACE-SAVING HANGING VERSION.

→ SC 400 SB





# WHAT SAYS MORE WITH PICTURES THAN WITH WORDS?

## → Maximum Comfort

The Bizerba SC 400 is set apart by one outstanding feature: the remarkably wide range of applications. This high-tech system scale is suited for use as a counter quick-service or self-service scale, for pricing and stock-taking purposes or as a check-out terminal. A cash draw and integrated check-out function enhance its versatility even further. A simple keystroke allows quick and convenient changing over from one mode to another whereas its Euro-key leaves you well-prepared for the future.

## → First-rate Technology

The programmable flash-RAM allows you to update the scale's program simply via the PC. Therefore the complex and time-consuming procedure of changing individual EPROMs is no longer necessary. This will undoubtedly prove profitable by reducing your spending on material and maintenance. The Bizerba SC 400 models benefit from state-of-the-art processors which give them their enormous operating speed.

## → Ready for the EURO with the SC 400

With its integrated Euro-function, the Bizerba SC 400 is well prepared for the future. Changing over could not be easier: Just pressing the Euro-key switches between your national currency and the EURO.

## → Easy Operation


The freely configurable and clearly arranged keyboard is designed so that it can be adapted to your individual requirements. The basic version comprises 48 direct article keys what can be extended by a further 24 keys to a maximum of 72, should the need arise for example in order to accommodate a particularly wide range of products. Colour pictograms and article descriptions combined with clear numbering not only allow smooth handling, but also ensure that the user maintains an exceptionally good overview at all times. Operation as a quick-service scale is made equally straightforward by means of the tactile keyboard permitting variable assignment of the keys. Furthermore, 150 articles can be entered via direct keys when using the scale in quick-service mode.

**NEW! BIZERBA LINER**



- **More labels**  
With the same roll size
- **Fewer roll changes** with frequency.
- **Safe, hygienic bond of bag** – no hazard caused by staples.
- **Less waste – no backing**  
Helps protect the environment, save energy costs.
- **Only with Bizerba Liner**  
adhesive-free grip edge

THE RETAIL SCALE WITH UP TO 150 IMPRESSIVE ARTICLE SYMBOLS.

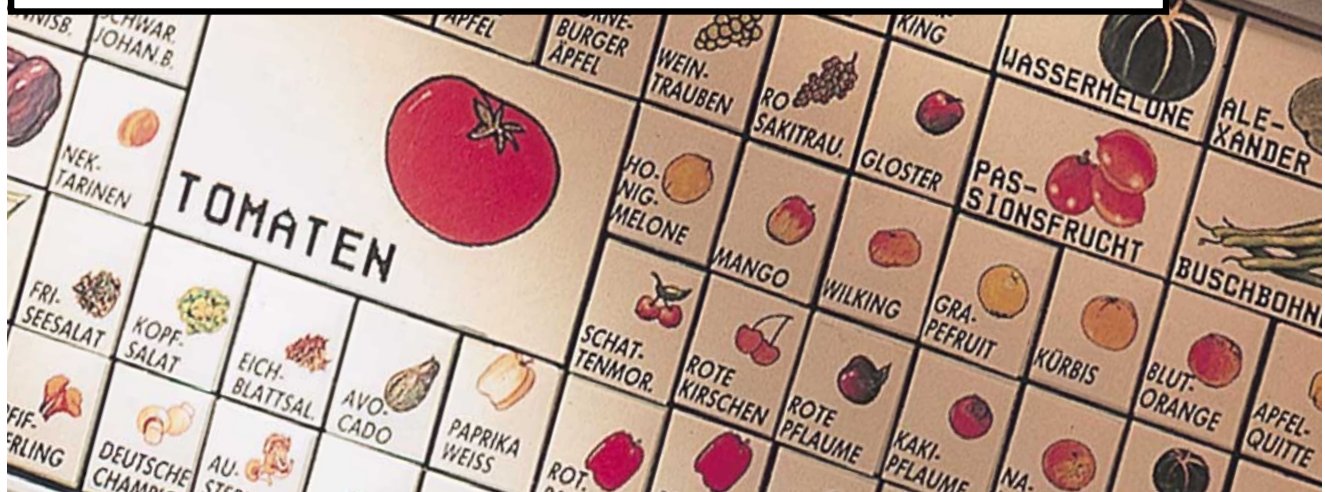

**BLESS PRINTER**

el roll with-  
asking paper.



th high customer

the shopping  
ed by metal

ing paper.  
onment and

less: Label with  
e.

**→ À la Carte Reports and Analyses**

One simple keystroke initiates a complete procedure. This saves you valuable time, avoids operational errors and facilitates the compilation of time-controlled reports without the involvement of staff. The analyses can be composed according to customer-specific needs: up to 99 freely programmable sales periods mean that your periodic, daily, weekly and monthly reports are printed out automatically as well as punctually to meet the needs of your business.

**→ Informative Display**

The display is available in four different colours, yellow, blue, green and transparent – either positive or negative. As a result the scale can be adapted to your specific environment. A configurable LCD-display allows adjustment to various light conditions. Furthermore, it is graphic-capable and shows the information in different font types and sizes. This means it has no tiring effect on your staff and customers can follow all the information displayed effortlessly.

The article text of up to 35 characters in length permits the display of extensive product descriptions on the scale.

**→ Graphic-capable printer**

The thermal labels can be printed out with your individual style in mind. You can combine exceptionally well-defined fonts with brilliant graphics and your company logo. This highlights one outstanding feature: The fast and graphic-capable printer turns all your printouts into your very own personal calling cards.

**→ Easy Cleaning**

The smooth housing and the sealed, wear-resistant tactile keyboard facilitate effortless daily cleaning of the scale. More thorough cleaning is made easy by the thermal printhead which simply swings aside.



**→ Examples for receipts and labels in original size**

**FRENCH BREAD**  
**PAN FRANCES BREAD**  
ENR. FLOUR(FLOUR,MALTED BARLEY FLOUR,NIACIN, IRON,THIAMIN MONONITRATE,RIBOFLAVIN),WATER, YEAST,DEXTRASE,SALT,SUGAR,PART.HYD.SOYBEAN OIL, CORNSTARCH,WHEAT GLUTEN,SOY FLOUR,DICETYL TARTARIC ACID ESTERS OF MONO-&DIGLYCERIDE, CALCIUM STEAROYL LACTYLATE,MONOAND DIGLYCERIDES, POTASSIUM BROMATE,L-CYSTEINE,ASCORBIC ACID, ENZYMES,AZODICARBONAMIDE, TOPPED W/LIQUID MARGARINE(PART. HYD. & LIQUID SOYBEAN OIL,WATER, SALT,WHEY,HYD. COTTONSEED OIL,MONOAND DIGLYCERIDES,LECITHIN,SOD. BENZOATE (PRESERVATIVE),ART. FLAVOR,VIT.A PALMITATE,BETA CAROTENE (COLOR)),INSTANT BRITE WASH(WATER, CASEIN,DISODIUM PHOSPHATE,LECITHIN,POTASSIUM SORBATE,CARRAGEENAN,SPICES(TURMERIC,PAPRIKA))

**NET WT. 48oz (3LB Doz)**  
packed on: 06.07.1998 Sell-by: 06.09.1998

10227156 1802283

Numb.of pcs. 3  
**PRICE \$ 2.28**

**FARMER'S KITCHEN**

Dept. 1	POS 1	000309
07.06.1998 16:29:23	103/1	Un. 1
<b>Pcs.</b>	<b>£/pcs</b>	<b>£</b>
<b>BEEF BURGER</b>		<b>0.24</b>
<b>kg</b>	<b>£/100g</b>	<b>£</b>
<b>PARMA HAM</b>		
<b>0.664</b>	<b>0.09</b>	<b>0.60</b>
<b>CHICKEN LEGS</b>		<b>0.80</b>
<b>3 items Total</b>	<b>£</b>	<b>1.64</b>
Amount tend.	<b>£</b>	<b>2.00</b>
Change	<b>£</b>	<b>0.36</b>
07.06.1998 16:29:38C		

2 14 000301901649



# WHAT DO YOU DO IF THERE IS NOT ENOUGH ROOM ON YOUR COUNTER?

## → Modern times call for modern systems

The Bizerba SC is the focal point of a generation boasting numerous innovations, with the name Bizerba representing an assurance of outstanding quality. The abbreviation SC stands for "System Class" and symbolizes unrivalled functioning within a network. Combining these two features results in a great outlook for the future – above all for you.

## → One scale – two functions

The Bizerba SC 400 is used wherever space on the counter is limited. As it is placed outside the zone subjected to soiling, it improves hygiene in all critical areas.

Since we planned far ahead with the Bizerba SC 400, it is equipped with all interfaces required for today's and tomorrow's tasks.

This means you are fully prepared for applications and solutions such as scale-check-out-network, host connection or connection of up to two cash draws, scanner, modem and E-cash.

The Bizerba SC 400 offers you the choice between a 16-bit version and an even more powerful model featuring a 32-bit processor (SC-H). Furthermore it allows problem-free integration of up to 32 scales into a network. At this point the benefits of the extra-

ordinary system security of the variable data bases become apparent. Automatic updating ensures that the data is identical in all scales. This is particularly valuable when system scales are frequently connected into or taken out of the network, e.g. on occasions such as special campaigns.

Even more convenience and higher performance is achieved with Bizerba's computer controlled product management system CWS, the cost-effective PC-solution. CWS controls your business in the head office as well as in the individual branches and provides continuous support with your planning of production and flow of goods. Due to the comprehensive range of different modules it offers a wide choice of application options. Bizerba systems are unequalled in terms of flexibility and readiness for future applications.




## YOU MAKE USE OF THE HANGING SCALE SC 400'S DECISIVE ADVANTAGES





→ Weighing range (kg)	6 15 30 3/6 <sup>1)</sup> 6/15 <sup>1)</sup> 15/30 <sup>1)</sup> 15b 30b
→ Division (g)	2 5 10 1/2 2/5 5/10 -0.01 -0.01
→ Minimum load (g)	40 100 200 20 40 100 0.2 0.2
→ Maximum tare load (kg)	-6 -15 -30 -6 -15 -30 15b 30b Automatic scale zero, zero key programmable, printout under minimum weight depending on country-specific trading regulations.
→ Display	LCD- Dot matrix display. Numbers of characters for article text: approx. 35, Number of lines for programming: 6, Weight indication: 4 or 5 digits, Indication of basic price: 6 digits, Indication of sales price: 7 digits, Tare indication: 4 or 5 digits
→ Keyboard	Tactile keyboard, freely programmable, 84 keys, thereof 30 function keys and 54 direct PLU keys and further function keys, captionable direct keys: 30/54 (optional), add-on frame with 24 self service keys can be mounted on operating keyboard (optional)
→ Self-service keyboard	Short-stroke, tactile type. Number of self-service keys: 48. Frame with 24 self-service keys to slot onto the keyboard (optional). Very large self-service keys: max. 12. Max. number of self-service keys: 72. A mix of various key sizes is possible.
→ Quick-service keyboard	Short-stroke, tactile type. Number of QS keys: 96. Direct keys programmable on service keyboard: 54. Max. number of QS keys: 150. A mix of various key sizes is possible.
→ Programmable data per PLU:	Basic/unit price, product description up to 500 characters, additional texts up to 2000 characters, product group, sell-by-date, barcode, price overwrite, tare, VAT-rate, special offer price, special offer text, by count (=units), fixed weight, price based on kg, 100 g, lb, 1/2 lb, 1/4 lb, graduated price, timed campaigns, 3 price groups
→ Data storage:	<b>SC</b> model with 16-bit processor. Standard memory of 2 MB, for 7500 PLU <sup>2)</sup> with basic price and 29-digit article text, upgradable to 6 MB (optional) 32000/ PLU. Up to 120 product groups, 30 main product

→ Dimensions mm (inches)

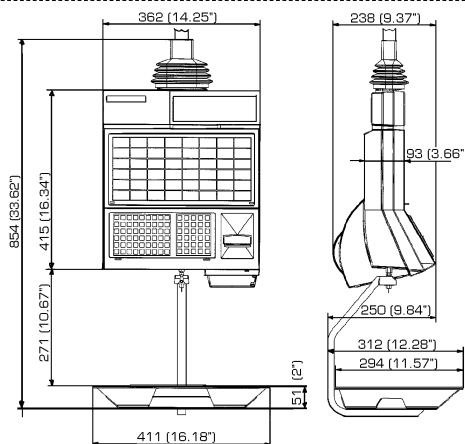

→ SC 400

groups, 30 departments, 8 main departments with 20-digit text, 99 different moving promotional texts with 198 characters each, 256 vendors

**Typ SC-H** model same as SC but with 32-bit processor. Upgradable to 10 MB (optional) for more than 32000 PLU

→ Thermal label printer (SC 400 E)	Graphic-capable printer with a speed of 102 mm/s. Printing of logos, inverted printing, upper-case or lower-case letters, EAN-/UPC barcode, 9 font sizes, up to 15 headers and base texts, labels freely configurable, 2 printing directions, various label sizes, resetting for adhesive ticket and receipt printout
→ Linerless printer	For label rolls without backing paper
→ Interfaces	<b>SC</b> model System bus (RS 485) for network with up to 32 scales, (RS 232, licensed interface protocol) serial interface for connection to EDP or for connection of scanner or electronic-cash-terminal, control of up to two cash draws (optional), wireless JEEE 802.11 (optional) <b>SC-H</b> model same SC but with 2 additional serial Interfaces (optional), Ethernet-interface (optional), wireless JEEE 802.11 (optional)
→ Reports/Analyses	Number of sales periods: freely configurable (up to 99) for PLU, product groups, main product groups, VAT-rate, vendor, department, main department, training, sales volumes by department, product group, vendor, various sorting criteria, price modification journal, article modification journal, electronic receipt journal. In combination with licensed software: cashier, stock taking, re-weighing of wastage, returns, operator time recording
→ Further features	Ticket voiding, scroll function with voiding, pay-in/pay-out mode, foreign currency conversion, function menus, various operating modes, labelling modes: Weight and fixed price, quantity preselection for automatic printout, separate sales reports, scale program loadable via interface (Flash-RAM), self and quick service, various tare modes, vendor log in and log off, operational assistance by dot matrix display, menu password protected
→ Licensed software	Interface protocols, check-out functions, scanning, electronic-cash, operator time recording, stock taking, re-weighing of wastage, branch returns, delivery note, purchase order, return delivery, immediate invoice for cash and carry
→ Working temperature range	-10° bis +40°C
→ Operating voltage	230 V or 120 V (optional)
→ Power consumption	at 230 V min. 125 mA / max 220 mA at 120 V min. 240 mA / max 440 mA
→ Line frequency	50/60 Hz

<sup>1)</sup> Optional <sup>2)</sup> The number of PLUs depends on the configuration of the data storage with additional functions, the memory capacity can be upgraded in stages (optional) in order to adapt to requirements.



# BIZERBA

\_balanced information